
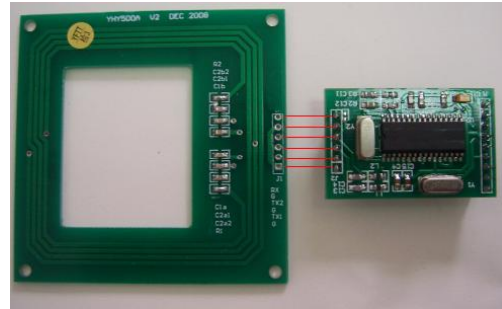


YHY502CG

13.56MHz RFID Mifare[®] Read/Write Module

DATASHEET

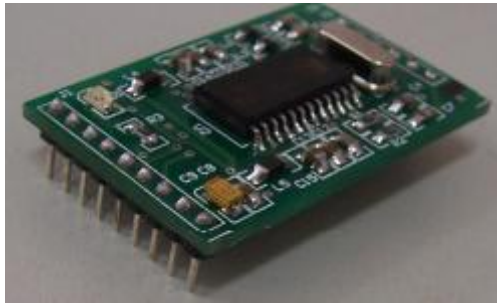

- ▲ Complete Read/Write module
- ▲ Auto checks for presence of a tag
- ▲ Contactless operating frequency 13.56 MHz
- ▲ Supports ISO14443A /MIFARE[®] ,Mifare[®] Classic1K,Mifare[®] Classic 4K
- ▲ TTL RS232 Interface, baud rate19200bps
- ▲ Fast data transfer Contactless communication up to 106KHz
- ▲ Secure Encrypted contactless communication
- ▲ Ideal for emoney,secure access and fast data collection applications
- ▲ Typical Operating Distance: 0 – 60 mm
- ▲ Operating Voltage : DC 3.0-5.5V
- ▲ Watchdog timer
- ▲ 1 LED indicator
- ▲ Unique serial number on each device
- ▲ Size: 40mm × 25mm × 6mm

Scope

This document describes the basic functionality and the electric specifications of the YHY502CG read/write module.

This contactless module is designed for an easy reader adaptation to a host to use this device for test and application purpose.

There is need only one command to finish one action, such as read or write card data. It needs no request, anticoll or selection. The module will do it for you automatically. What you need is just send one command to the module. Then it will send back what you want. Anything is just so **simple** and so **easy**.

Also, if there is any card go into the rf field, the red led on the module will light and the SIG pin will change from "1" to "0" to indicate the event.

1. Pin Information

YHY502CG is a module that is integrated with 8bit microcontroller, analog&digital signal processor and necessary passive components on both top layer to complete a fully functional Mifare[®] read/write module.



Figure 1 – YHY502CG J1 PinOut TOPView

J1 Interface:

Pin	Symbol	IO Type	Description
J1-1	RXD	I/O	Uart Receiver
J1-2	TXD	I/O	Uart Transmitter
J1-3	OUT1	I/O	Output 1
J1-4	OUT2	I	Output 2
J1-5	RST	I	Reset, active-low, floating for power-on reset by default
J1-6	BUZ	I	Buzzer output, high level drive
J1-7	SIG	O	Interrupt output, LOW level indicates card in the field
J1-8	VCC	Power	Power positive
J1-9	GND	GND	Power Negative

Table1 – J1 Pin information

2. Introduction

YHY502CG is a compact 13.56MHz RFID Read / Write module designed for ISO14443A standard and supports Mifare[®] Classic 1K, Mifare[®] Classic 4K transponders. It is controlled by external device over UART with simple protocols defined in this sheet.

YHY502CG can be easily and quickly integrated into RFID applications with very less effort. Mifare[®] Classic is a secure memory (1Kbyte, 4KByte) chip/card often called contactless smart card. The reason it is called smartcard is because it has increment and decrement functions designed for especially payment systems. Mifare[®] Classic family of tags is being used in RFID applications where very high security and fast data collection systems are required. This family of tags has contactless communication speed up to 106 KHz and uses very strong encryption techniques. If the user want to copy or modify the content of the Mifare[®]Classic family of tags then he needs the correct key(s) when it is protected. As a result Mifare[®] become ideal for e-money applications, secure access, data storage and fast data collection systems. Not only limited with these applications but printed antenna technology makes possible to find very thin and low cost Mifare[®] tags (e.g. labels,stickers) so that extending the field of RFID applications.

3. Mifare[®] Brief Technical Information

For Mifare[®] tag memory organization and communication principles please refer to Mifare[®] S50 en.pdf document (Standard Card IC MF1 IC S50) of NXP. Mentioned document gives functional specification of the IC used in Mifare[®] 1K tags. Same communication principles are valid for Mifare[®] 4K (MF1 IC S70) tags. Documents can be downloaded at <http://www.nxp.com>. Communication principles are greatly simplified by YHY502CG module. When read or write the card, it just need to send one read/write command with keyA/B for authenticate, the module would perform request, anticoll and select card itself.

4. Communication Protocols

4.1 Command lists:

This chapter describes the protocol and commands which is used by the YHY502CG to communication with host.

Code	Command	Description
0x01	Module Type	Read Module Type
0x02	Module Serial Number	Read Module Serial Number
0x03	Power Down	Set Module Power Down
0x10	Firmware Version	Read Module Firmware Version
0x11	Antenna control	Set Module Antenna on or off
0x12	Card IDLE	Set Card IDLE
0x13	Seek	Set Auto-Search Card
0x14	Beep	Set Buzzer ON/OFF
0x15	Beep interval	Set buzzer beep interval time
0x16	Output1	Set Output 1
0x17	Output2	Set Output 2
0x19	Card type	Read Card Type
0x20	Card serial number	Read card serial number
0x21	Block Read	Read Card Block data, 16 bytes
0x22	Block Write	Write Card Block data, 16 bytes
0x23	Initialize epurse	Initialize one block into epurse value
0x24	Value read	Read ePurse Value, 4 bytes
0x25	Increment	Increase ePurse Value, 4 bytes
0x26	Decrement	Decrease Purse Value, 4 bytes

Table2 – Command list

4.2 Protocol

UART: (default: 19200bps,N,8,1)

The communication between the host and the module communicates at 19200bps, N, 8, 1.

The host first sends the command and the module executes the operation and replies with a response to the command. The host can analyze the reply to check if the operation was successful or if any error occurred during the operation.

Following is the UART frame for the commands sent by the host:

Header	Length	Command	Data	CSUM
2 Byte	1 Byte	1 Byte	N Bytes	1 Byte

Table 4.2-1 – UART frame send by Host

1. Header: This header has 2 bytes that indicates the beginning of a frame. These 2 bytes should be always 0xAA 0xBB.

2. Length: This byte is used to indicate the length of the payload data. This includes the Length, Command and the Data bytes

3. Command: This byte is used to instruct the module on what operation to perform

4. Data: These are parameters for the module to execute the command. For example, for a Read command, the data will be the block number to be read and the authenticated key. For a Write command, this will be the block number and the authenticated key and 16

bytes data to write into the block. For other command, it may be empty.

5. CSUM: This is the checksum byte. This byte is used on the host as well as the module to check the validity of the packet and to trap any data corruption. This is calculated by **XOR** all the bytes in the packet except the Header and CSUM byte.

$$\text{CSUM} = \text{Length} \oplus \text{Command} \oplus \text{Data}[0] \oplus \text{Data}[1] \dots \oplus \text{Data}[n-1]$$

Note: If there is one byte "0xAA" in the packet data from Length to CSUM, please insert one byte "0x00" after "0xAA", but the Length need not change.

Code example:

```
//-----
if (cSendBuffer[i] == 0xAA)
{
    TI = 0;
    SBUF = 0;
    while (!TI);
}
//-----
```

Following is the UART frame for the response packets sent by YHY502CG module in response to the commands:

Header	Length	Status	Response	CSUM
2 Byte	1 Byte	1 Byte	N Bytes	1 Byte

Table 4 – UART frame send by YHY502CG module

1. Header: This header has 2 bytes that indicates the beginning of a frame. These 2 bytes should be always 0xAA 0xBB.

2. Length: This byte is used to indicate the length of the payload data. This includes the Length, Command and the Data bytes

3. Status: This is the status for which the response is being sent back. If ok then the module return the command which host has sent, else it return the ones-complement code. For example, the command is 0x19, then the ones-complement code is 0xe6.

4. Response: This contains the result data if an operation was successful. It may be empty.

5. CSUM: This is the checksum byte. This byte is used on the host as well as the module to check the validity of the packet and to trap any data corruption. This is calculated by **XOR** all the bytes in the packet except the Header and CSUM byte.

$$\text{CSUM} = \text{Length} \oplus \text{Command} \oplus \text{Response}[0] \oplus \text{Response}[1] \oplus \dots \oplus \text{Response}[n-1]$$

5. Commands & Responses

In this chapter detailed information and UART frame examples are given for command and

responses.

After power on the module, the red led will flash one time.

If a Mifare® tag detected by the module, the red led will light and it will set SIG pin to “0” till the tag moves out of field.

(The following data are not specified is in hexadecimal)

5.1 Module Type

Command description: Read module type

Data Frame Format:

Send	Head	Length	Command	XOR Checksum
	AA BB	02	01	03

Receive	Head	Length	Command	Module Type	XOR Checksum
Success	AA BB	0A	01	8Bytes	XOR Checksum
Failure	AA BB	02	FE	-	FC

Example:

Send	AA BB 02 01 03				
Description	AA BB	Head of this COMMAND			
	02	Length of this COMMAND			
	01	COMMAND			
	03	02 @ 01			
Receive(Success)	AA BB 0A 01 48 59 35 30 32 43 20 20 6E				
Description	AA BB	Head of this DATA			
	0A	Length of this DATA			
	01	COMMAND			
	48 59 35 30 32 43 20 20				Module TYPE
	6E				0A @ 01 @ 48 @ 59 @ 35 @ 30 @ 32 @ 43 @ 20 @ 20
Receive(Failure)	AA BB 02 FE FC				
Description	AA BB	Head of this DATA			
	02	Length of this DATA			
	FE	One's complement of COMMAND			
	FC	02 @ FE			

5.2 Module Serial Number

Command description: Read Module Serial Number

Note: Each module has it's unique serial number.(NOT card serial number)

Data Frame Format:

Send	Head	Length	Command	XOR Checksum
	AA BB	02	02	00

Receive	Head	Length	Command	Module SN	XOR Checksum
Success	AA BB	06	02	4Bytes	XOR Checksum
Failure	AA BB	02	FD	-	FF

Example:

Send	AA BB 02 02 00				
Description	AA BB	Head of this COMMAND			
	02	Length of this COMMAND			
	02	COMMAND			

		00	02 @ 02
Receive(Success)	AA BB 06 02 00 00 00 01 05		
Description	AA BB	Head of this DATA	
	06	Length of this DATA	
	02	COMMAND	
	00 00 00 01	Module SN	
	05	06 @ 02 @ 00 @ 00 @ 00 @ 01	
Receive(Failure)	AA BB 02 FD FF		
Description	AA BB	Head of this DATA	
	02	Length of this DATA	
	FD	One's complement of COMMAND	
	FF	02 @ FD	

5.3 Power Down

Command description: After execute this Command the module will power down , To wake up the module need to give the RST pin a low-level pulse or Re-power on.

Data Frame Format:

Send	Head	Length	Command	XOR Checksum
	AA BB	02	03	01

Receive	Head	Length	Command	XOR Checksum
Success	AA BB	02	03	01
Failure	AA BB	02	FC	FE

Example:

Send	AA BB 02 03 01		
Description	AA BB	Head of this COMMAND	
	02	Length of this COMMAND	
	03	COMMAND	
	01	02 @ 03	
Receive(Success)	AA BB 02 03 01		
Description	AA BB	Head of this DATA	
	02	Length of this DATA	
	03	COMMAND	
	01	02 @ 03	
Receive(Failure)	AA BB 02 FC FE		
Description	AA BB	Head of this DATA	
	02	Length of this DATA	
	FC	One's complement of COMMAND	
	FE	02 @ FC	

5.4 Module Firmware Version

Command description: Read Module Firmware Version

Data Frame Format:

Send	Head	Length	Command	XOR Checksum
	AA BB	02	10	12

Receive	Head	Length	Command	Module Firmware Version	XOR Checksum
Success	AA BB	06	10	4Bytes	XOR Checksum
Failure	AA BB	02	EF	-	ED

Example:

Send	AA BB 02 10 12	
Description	AA BB 02 10 12	Head of this COMMAND Length of this COMMAND COMMAND 02 @ 10
Receive(Success)	AA BB 06 10 00 00 02 01 15	
Description	AA BB 06 10 <u>00 00 02 01</u> 15	Head of this DATA Length of this DATA COMMAND Module SN 06 @ 10 @ 00 @ 00 @ 02 @ 01
Receive(Failure)	AA BB 02 EF ED	
Description	AA BB 02 EF ED	Head of this DATA Length of this DATA One's complement of COMMAND 02 @ EF

5.5 Antenna control

Command description: Set the Module antenna power on or off .This command will switch RF field.

Data Frame Format:

Send	Head	Length	Command	Data	XOR Checksum
	AA BB	03	11	1Byte '00': antenna off '01': antenna on	XOR Checksum

Receive	Head	Length	Command	XOR Checksum
Success	AA BB	02	11	13
Failure	AA BB	02	EE	EC

Example:

Send	AA BB 03 11 00 12	
Description	AA BB 03 11 00 12	Head of this COMMAND Length of this COMMAND COMMAND 00: antenna off 03 @ 11 @ 00
Receive(Success)	AA BB 02 11 13	
Description	AA BB 02 11 13	Head of this DATA Length of this DATA COMMAND 02 @ 11
Receive(Failure)	AA BB 02 EE EC	
Description	AA BB 02 EE EC	Head of this DATA Length of this DATA One's complement of COMMAND 02 @ EE

5.6 Card IDLE

Command description: Set the Card into IDLE . After successfully operation the card will be idle. Reactivate the card need to remove the card from antenna area and put the card into antenna area again.

Data Frame Format:

Send	Head	Length	Command	XOR Checksum
	AA BB	02	12	10

Receive	Head	Length	Command	XOR Checksum
Success	AA BB	02	12	10
Failure	AA BB	02	ED	EF

Example:

Send	AA BB 02 12 10				
Description	AA BB	02	12	10	Head of this COMMAND Length of this COMMAND COMMAND 02 @ 12
Receive(Success)	AA BB 02 12 10				
Description	AA BB	02	12	10	Head of this DATA Length of this DATA COMMAND 02 @ 12
Receive(Failure)	AA BB 02 ED EF				
Description	AA BB	02	ED	EF	Head of this DATA Length of this DATA One's complement of COMMAND 02 @ ED

5.7 Seek

Command description: Set the module automatic search cards, 1 byte of data, 0x01 open automatic search cards, 0x00 closed. SIG pin active low when find a card untill remove the card or card idle.

Data Frame Format:

Send	Head	Length	Command	Data	XOR Checksum
	AA BB	03	13	1Byte '01': seek on '00': seek off	XOR Checksum

Receive	Head	Length	Command	XOR Checksum
Success	AA BB	02	13	11
Failure	AA BB	02	EC	EE

Example:

Send	AA BB 03 13 00 10					
Description	AA BB	03	13	00	10	Head of this COMMAND Length of this COMMAND COMMAND 00: auto off 03 @ 13 @ 00
Receive(Success)	AA BB 02 13 11					

Description	AA BB	Head of this DATA
	02	Length of this DATA
	13	COMMAND
	11	02 @ 13
Receive(Failure)	AA BB 02 EC EE	
Description	AA BB	Head of this DATA
	02	Length of this DATA
	EC	One's complement of COMMAND
	EE	02 @ EC

5.8 Set Buzzer ON/OFF

Command description: Set the buzzer ON or OFF, and control the buzzer beep times.

Data Frame Format:

Send	Head	Length	Command	Data	XOR Checksum
	AA BB	03	14	1Byte '1y': Buzzer ON and sound y times '0F': Buzzer OFF	XOR Checksum

Receive	Head	Length	Command	XOR Checksum
Success	AA BB	02	14	16
Failure	AA BB	02	EB	E9

Example:

Send	AA BB 03 14 13 04	
Description	AA BB	Head of this COMMAND
	03	Length of this COMMAND
	14	COMMAND
	13	beep 3 times
04	03 @ 14 @ 13	
Receive(Success)	AA BB 02 14 16	
Description	AA BB	Head of this DATA
	02	Length of this DATA
	14	COMMAND
	16	02 @ 14
Receive(Failure)	AA BB 02 EB E9	
Description	AA BB	Head of this DATA
	02	Length of this DATA
	EB	One's complement of COMMAND
	E9	02 @ EB

5.9 Set buzzer beep time interval

Command description: Set buzzer beep time interval .

Data Frame Format:

Send	Head	Length	Command	Ringling Interval	XOR Checksum
	AA BB	03	15	1Byte	XOR Checksum

Receive	Head	Length	Command	XOR Checksum
Success	AA BB	02	15	17
Failure	AA BB	02	EA	E8

Example:

Send	AA BB 03 15 10 06	
Description	AA BB 03 15 10 06	Head of this COMMAND Length of this COMMAND COMMAND Beep time Interval 03 @ 15 @ 10
Receive(Success)	AA BB 02 15 17	
Description	AA BB 02 15 17	Head of this DATA Length of this DATA COMMAND 02 @ 17
Receive(Failure)	AA BB 02 EA E8	
Description	AA BB 02 EA E8	Head of this DATA Length of this DATA One's complement of COMMAND 02 @ EA

5.10 Output 1

Command description: Set Output1

Data Frame Format:

Send	Head	Length	Command	Data	XOR Checksum
	AA BB	03	16	1Byte '00': Output '1' '01': Output '0'	XOR Checksum

Receive	Head	Length	Command	XOR Checksum
Success	AA BB	02	16	14
Failure	AA BB	02	E9	EB

Example:

Send	AA BB 03 16 01 04	
Description	AA BB 03 16 01 04	Head of this COMMAND Length of this COMMAND COMMAND Output 0 03 @ 16 @ 01
Receive(Success)	AA BB 02 16 14	
Description	AA BB 02 15 17	Head of this DATA Length of this DATA COMMAND 02 @ 17
Receive(Failure)	AA BB 02 E9 EB	
Description	AA BB 02 E9 EB	Head of this DATA Length of this DATA One's complement of COMMAND 02 @ E9

5.11 Output 2

Command description: Set Output2

Data Frame Format:

Send	Head	Length	Command	Data	XOR Checksum
------	------	--------	---------	------	--------------

	AA BB	03	17	1Byte '00': Output '1' '01': Output '01'	XOR Checksum
--	-------	----	----	------------------------------------------------	--------------

Receive	Head	Length	Command	XOR Checksum
Success	AA BB	02	17	15
Failure	AA BB	02	E8	EA

Example:

Send	AA BB 03 17 01 05					
Description	AA BB	03	17	01	05	Head of this COMMAND Length of this COMMAND COMMAND Output 0 03 @ 17 @ 01
Receive(Success)	AA BB 02 17 15					
Description	AA BB	02	17	15	Head of this DATA Length of this DATA COMMAND 02 @ 17	
Receive(Failure)	AA BB 02 E8 EA					
Description	AA BB	02	E8	EA	Head of this DATA Length of this DATA One's complement of COMMAND 02 @ E8	

5.12 Card Type

Command description: Read card type. S50 card is '0x0400', S70 card is '0x0200', the others can refer to card datasheet.

Data Frame Format:

Send	Head	Length	Command	XOR Checksum
	AA BB	02	19	1B

Receive	Head	Length	Command	Card Type	XOR Checksum
Success	AA BB	04	19	2Bytes	XOR Checksum
Failure	AA BB	02	E6	-	E4

Example:

Send	AA BB 02 19 1B					
Description	AA BB	02	19	1B	Head of this COMMAND Length of this COMMAND COMMAND 02 @ 19	
Receive(Success)	AA BB 04 19 04 00 19					
Description	AA BB	04	19	04 00	19	Head of this DATA Length of this DATA COMMAND Card TYPE 04 00: S50 Card; 02 00: S70 Card 02 @ 19 @ 04 @ 00
Receive(Failure)	AA BB 02 E6 E4					
Description	AA BB	02	E6	E4	Head of this DATA Length of this DATA	

	E6	One's complement of COMMAND
	E4	02 @ E6

5.13 Card serial number

Command description: This command reads card serial number

Data Frame Format:

Send	Head	Length	Command	XOR Checksum
	AA BB	02	20	22

Receive	Head	Length	Command	Card SN	XOR Checksum
Success	AA BB	06	20	4Bytes	XOR Checksum
Failure	AA BB	02	DF	-	DD

Example:

Send	AA BB 02 20 22				
Description	AA BB	Head of this COMMAND			
	02	Length of this COMMAND			
	20	COMMAND			
	22	02 @ 20			
Receive(Success)	AA BB 06 20 92 BF 72 59 20				
Description	AA BB	Head of this DATA			
	06	Length of this DATA			
	20	COMMAND			
	92 BF 72 59	Card SN			
	20	06 @ 20 @ 92 @ BF @ 72 @ 59			
Receive(Failure)	AA BB 02 DF DD				
Description	AA BB	Head of this DATA			
	02	Length of this DATA			
	DF	One's complement of COMMAND			
	DD	02 @ DF			

5.14 Block read

Command description: Read data from appointed card's block.

Data Frame Format:

Send	Head	Length	Command	Key A or Key B	Block Number	Key	XOR Checksum
	AA BB	0A	21	1Byte '00': Key A '01': Key B	1Byte	6 Bytes	XOR Checksum

Receive	Head	Length	Command	Block Data	XOR Checksum
Success	AA BB	12	21	16Bytes	XOR Checksum
Failure	AA BB	02	DE	-	DC

Example:

Send	AA BB 0A 21 00 08 FF FF FF FF FF FF 23						
Description	AA BB	Head of this COMMAND					
	0A	Length of this COMMAND					
	21	COMMAND					
	00	Authenticate with A Key					
	08	Read Block 08					
	FF FF FF FF FF FF	Keys					

		23	0A @21 @00 @08 @FF @FF @FF @FF @FF @FF
Receive(Success) (*)	AA BB 12 21	00 11 22 33 44 55 66 77 88 99 AA	00 BB CC DD EE FF 23
Description	AA BB		Head of this DATA
	12		Length of this DATA
	21		COMMAND
	00 11 22 33 44 55 66 77		16 Bytes Data of Block 08
	88 99 AA 00 BB CC DD		
	EE FF		
	23		12 @21 @00 @11 @22 @33 @44 @55 @66 @77 @88 @99 @AA @BB @CC @DD @EE @FF
Receive(Failure)	AA BB 02 DE DC		
Description	AA BB		Head of this DATA
	02		Length of this DATA
	DE		One's complement of COMMAND
	DC		02 @DE

(*): 00 is added but the length does not change.

5.15 Block Write

Command description: Write data to appointed card's block.

Data Frame Format:

Send	Head	Length	Command	Key A or Key B	Block Number	Key	Data want to write	XOR Checksum
	AA BB	1A	22	1Byte '00': Key A '01': Key B	1Byte	6 Bytes	16Bytes	XOR Checksum

Receive	Head	Length	Command	XOR Checksum
Success	AA BB	02	22	20
Failure	AA BB	02	DD	DF

Example:

Send (*)	AA BB 1A 22	00 08	FF FF FF FF FF FF	00 11 22 33 44 55 66 77	88 99 AA 00 BB CC DD EE FF 30
Description	AA BB				Head of this COMMAND
	1A				Length of this COMMAND
	22				COMMAND
	00				Authenticate with A Key
	08				Read Block 08
	FF FF FF FF FF FF				Keys
	00 11 22 33 44 55 66 77				16 Bytes Data want to Write
88 99 AA BB CC DD EE					
	FF				
	30				1A @21 @00 @08 @FF @FF @FF @FF @FF @FF @00 @11 @22 @33 @44 @55 @66 @77 @88 @99 @AA @BB @CC @DD @EE @FF
Receive(Success)	AA BB 02 22 20				
Description	AA BB				Head of this DATA
	02				Length of this DATA
	22				COMMAND
	20				02 @22
Receive(Failure)	AA BB 02 DD DF				
Description	AA BB				Head of this DATA
	02				Length of this DATA
	DD				One's complement of COMMAND

	<i>DF</i>	<i>02 @DD</i>
--	-----------	---------------

(*): 00 is added but the length does not change.

5.16 Initialize ePurse

Command description: Initialize block as epurse value, the 4-byte purse value of command related to purse operation is low byte first, and the purse value is 4 bytes signed.

Data Frame Format:

Send	Head	Length	Command	Key A or Key B	Block Number	Key	Purse Value	XOR Checksum
	AA BB	0E	23	1Byte '00': Key A '01': Key B	1Byte	6 Bytes	4Bytes (LSB...MSB)	XOR Checksum

Receive	Head	Length	Command	XOR Checksum
Success	AA BB	02	23	21
Failure	AA BB	02	DC	DE

Example:

Send	AA BB 0E 23 00 09 FF FF FF FF FF FF 11 11 00 00 24
Description	<p style="text-align: right;">AA BB Head of this COMMAND 0E Length of this COMMAND 23 COMMAND 00 Authenticate with A Key 09 Initialize Block 09 as a Purse FF FF FF FF FF FF Keys 11 11 00 00 4 Bytes Value of Purse 24 $0E @ 23 @ 00 @ 09 @ FF @ FF @ FF @ FF @ FF @ FF @ 11 @ 11 @ 00 @ 00$</p>
Receive(Success)	AA BB 02 23 21
Description	<p style="text-align: right;">AA BB Head of this DATA 02 Length of this DATA 23 COMMAND 21 $02 @ 23$</p>
Receive(Failure)	AA BB 02 DC DE
Description	<p style="text-align: right;">AA BB Head of this DATA 02 Length of this DATA DC One's complement of COMMAND DE $02 @ DC$</p>

5.17 Read Purse Value

Command description: Read purse value.

Data Frame Format:

Send	Head	Length	Command	Key A or Key B	Block Number	Key	XOR Checksum
	AA BB	0A	24	1Byte '00': Key A '01': Key B	1Byte	6Bytes	XOR Checksum

Receive	Head	Length	Command	Purse Value	XOR Checksum
Success	AA BB	06	24	4Bytes (LSB...MSB)	XOR Checksum
Failure	AA BB	02	DB	-	D9

Example:

Send	AA BB 0A 24 00 09 <u>FF FF FF FF FF FF</u> 27	
Description	AA BB Head of this COMMAND 0A Length of this COMMAND 24 COMMAND 00 Authenticate with A Key 09 Block 09 is a Purse <u>FF FF FF FF FF FF</u> Keys 27 0A @24 @00 @09 @FF @FF @FF @FF @FF @FF @FF	
Receive(Success)	AA BB 06 24 11 11 00 00 22	
Description	AA BB Head of this DATA 06 Length of this DATA 24 COMMAND <u>11 11 00 00</u> Value of Purse 22 06 @24 @11 @11 @00 @00	
Receive(Failure)	AA BB 02 DB D9	
Description	AA BB Head of this DATA 02 Length of this DATA DB One's complement of COMMAND D9 02 @DB	

5.18 Increase Purse Value

Command description: Increase purse value

Data Frame Format:

Send	Head	Length	Command	Key A or Key B	Block Number	Key	Increase Value	XOR Checksum
	AA BB	0E	25	1Byte '00': Key A '01': Key B	1Byte	6 Bytes	4Bytes (LSB...MSB)	XOR Checksum

Receive	Head	Length	Command	XOR Checksum
Success	AA BB	02	25	27
Failure	AA BB	02	DA	D8

Example:

Send	AA BB 0E 25 00 09 <u>FF FF FF FF FF FF</u> 11 11 00 00 22	
Description	AA BB Head of this COMMAND 0E Length of this COMMAND 25 COMMAND 00 Authenticate with A Key 09 Block 09 is a Purse <u>FF FF FF FF FF FF</u> Keys <u>11 11 00 00</u> Value of Increase 22 0E @25 @00 @09 @FF @FF @FF @FF @FF @FF @FF @11 @11 @00 @00	
Receive(Success)	AA BB 02 25 27	
Description	AA BB Head of this DATA 02 Length of this DATA 25 COMMAND 27 02 @25	
Receive(Failure)	AA BB 02 DA D8	
Description	AA BB Head of this DATA 02 Length of this DATA DA One's complement of COMMAND	

	<i>D8</i>	<i>02 @DA</i>
--	-----------	---------------

5.19 Decrease Purse Value

Command description: Decrease purse value

Data Frame Format:

Send	Head	Length	Command	Key A or Key B	Block Number	Key	Decrease Value	XOR Checksum
	AA BB	0E	26	1Byte '00': Key A '01': Key B	1Byte	6 Bytes	4Bytes (LSB...MSB)	XOR Checksum

Receive	Head	Length	Command	XOR Checksum
Success	AA BB	02	26	24
Failure	AA BB	02	D9	DB

Example:

Send	AA BB 0E 26 00 09 FF FF FF FF FF FF 11 11 00 00 21			
Description	<i>AA BB</i>	<i>Head of this COMMAND</i>		
	<i>0E</i>	<i>Length of this COMMAND</i>		
	<i>26</i>	<i>COMMAND</i>		
	<i>00</i>	<i>Authenticate with A Key</i>		
	<i>09</i>	<i>Block 09 is a Purse</i>		
	<i>FF FF FF FF FF FF</i>	<i>Keys</i>		
	<i>11 11 00 00</i>	<i>Value of Decrease</i>		
	<i>21</i>	<i>0E @26 @00 @09 @FF @FF @FF @FF @FF @FF @11 @11 @00 @00</i>		
Receive(Success)	AA BB 02 26 24			
Description	<i>AA BB</i>	<i>Head of this DATA</i>		
	<i>02</i>	<i>Length of this DATA</i>		
	<i>26</i>	<i>COMMAND</i>		
	<i>24</i>	<i>02 @26</i>		
Receive(Failure)	AA BB 02 D9 DB			
Description	<i>AA BB</i>	<i>Head of this DATA</i>		
	<i>02</i>	<i>Length of this DATA</i>		
	<i>D9</i>	<i>One's complement of COMMAND</i>		
	<i>DB</i>	<i>02 @D9</i>		

6. ELECTRICAL CHARACTERISTICS

6.1 ABSOLUTE MAXIMUM RATINGS

SYMBOL	PARAMETER	MIN	MAX	UNIT
Tamb,abs	Ambient or Storage Temperature Range	-40	+150	°C
VDD	DC Supply Voltages	-0.5	6	V
Vin,abs	Absolute voltage on any digital pin to GND	-0.5	VDD +0.5	V

Table 6-1: Absolute Maximum Ratings

6.2 Operating Condition Range

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
Tamb	Ambient Temperature	-	-25	+25	+85	°C
VDD	DC Supply Voltages	GND = 0V	3.0	3.3	3.6	V
			4.5	5.0	5.5	V
RD	Reading Distance	VDD=5.0V	0	50	60	mm
		VDD=3.3V	0	35	50	
WD	Writing Distance	VDD=5.0V	0	45	55	mm
		VDD=3.3V	0	30	45	

Table 6-2: Operating Condition Range

6.3 Current Consumption

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
IVDD1	Supply Current 1 VDD=4.5V-5.5V	Continuous read or write		70	150	mA
		Antenna Soft Power Down		11	20	mA
		Module Hard Power Down		70	160	μA
IVDD2	Supply Current 2 VDD=3.0V-3.6V	Continuous read or write		45	120	mA
		Antenna Soft Power Down		8	16	mA
		Module Hard Power Down		65	150	μA

Table 6-3: Current Consumption

7. Packaging Information

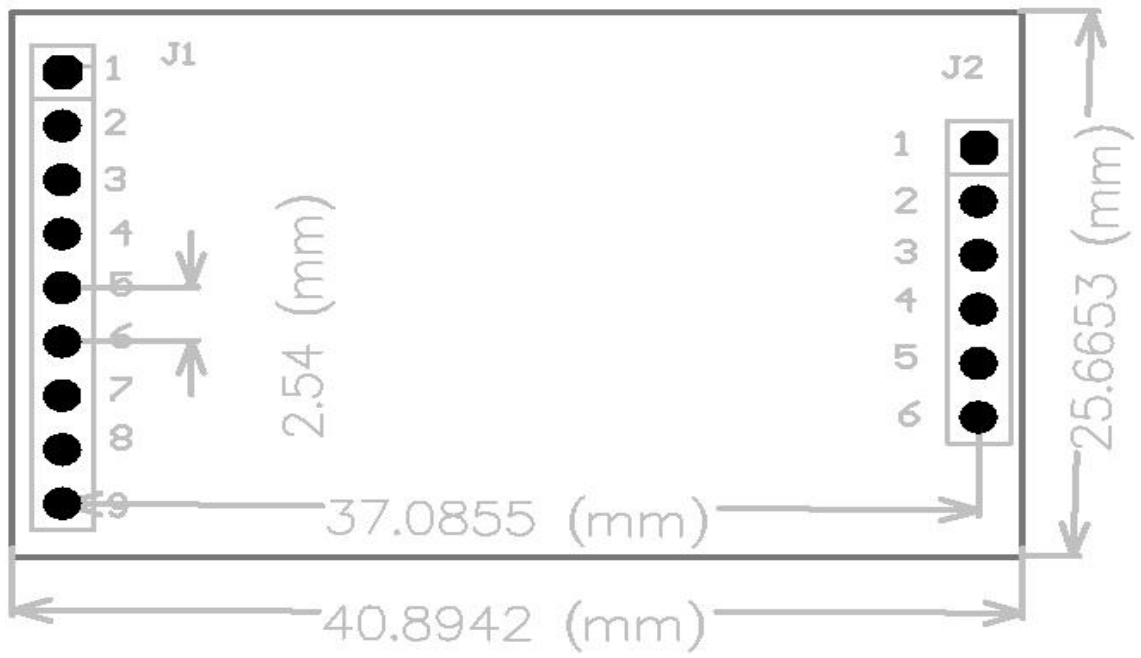


Figure 7-1 – Top View YHY502XG module size

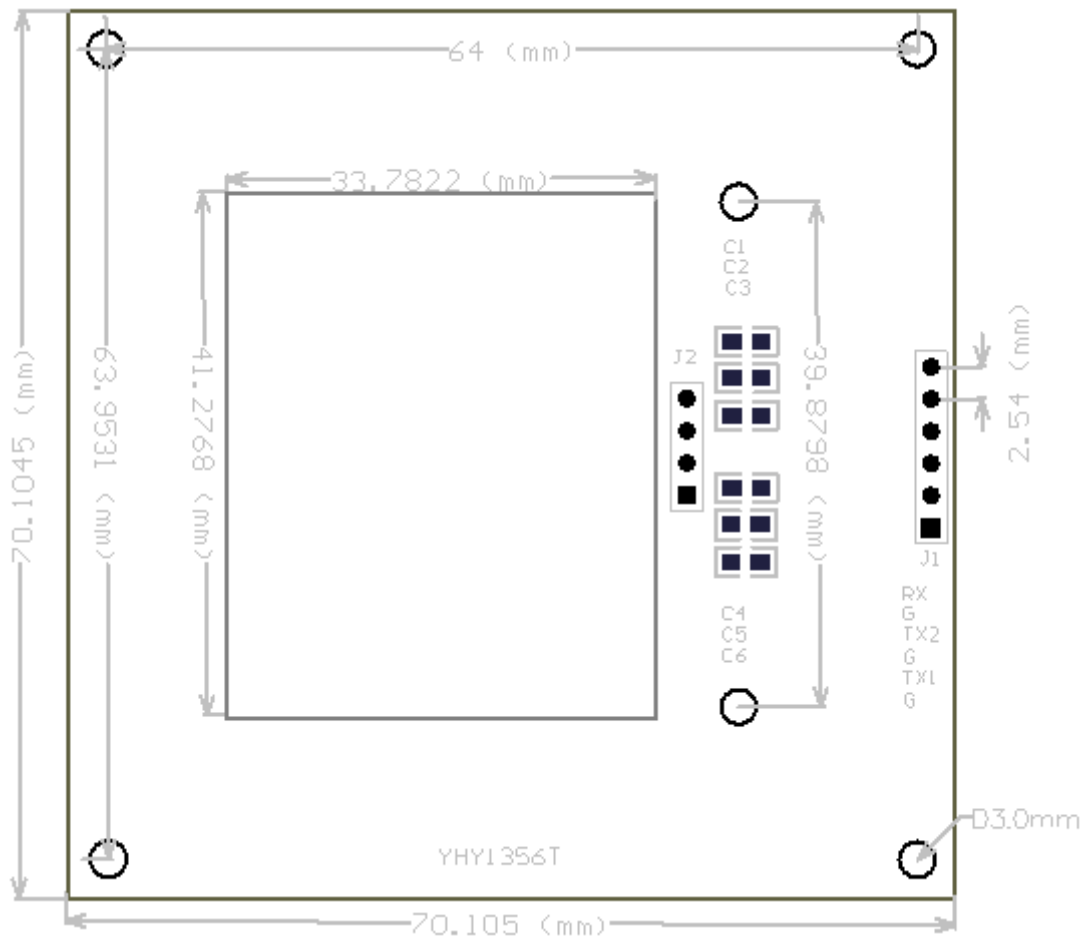


Figure 7-2 – Top View YHY1356T Antenna size

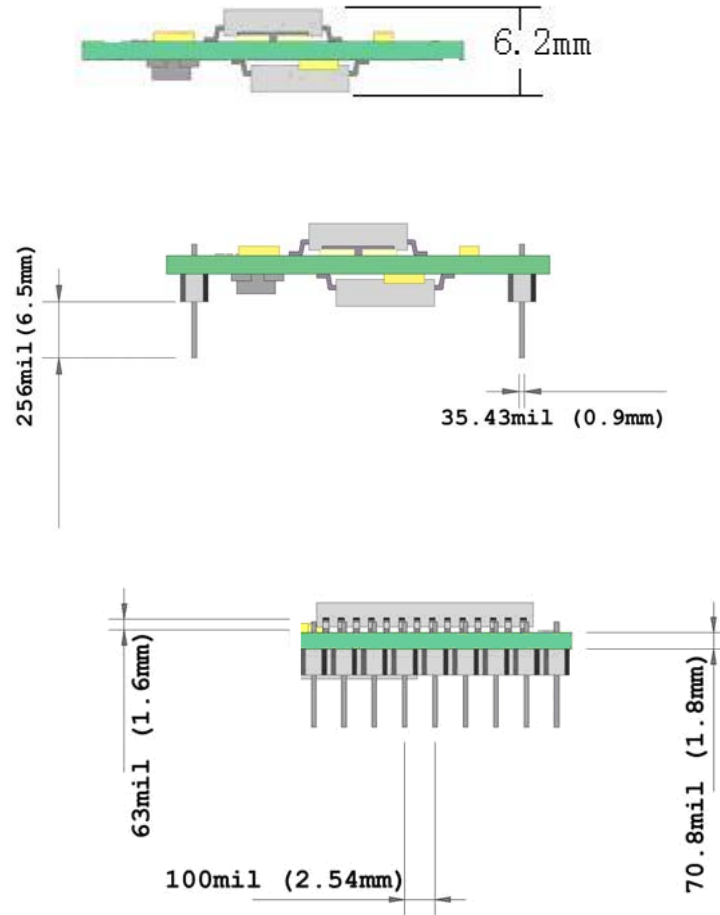


Figure 7-3 –Side View YHY502XG module